


ASA Strike

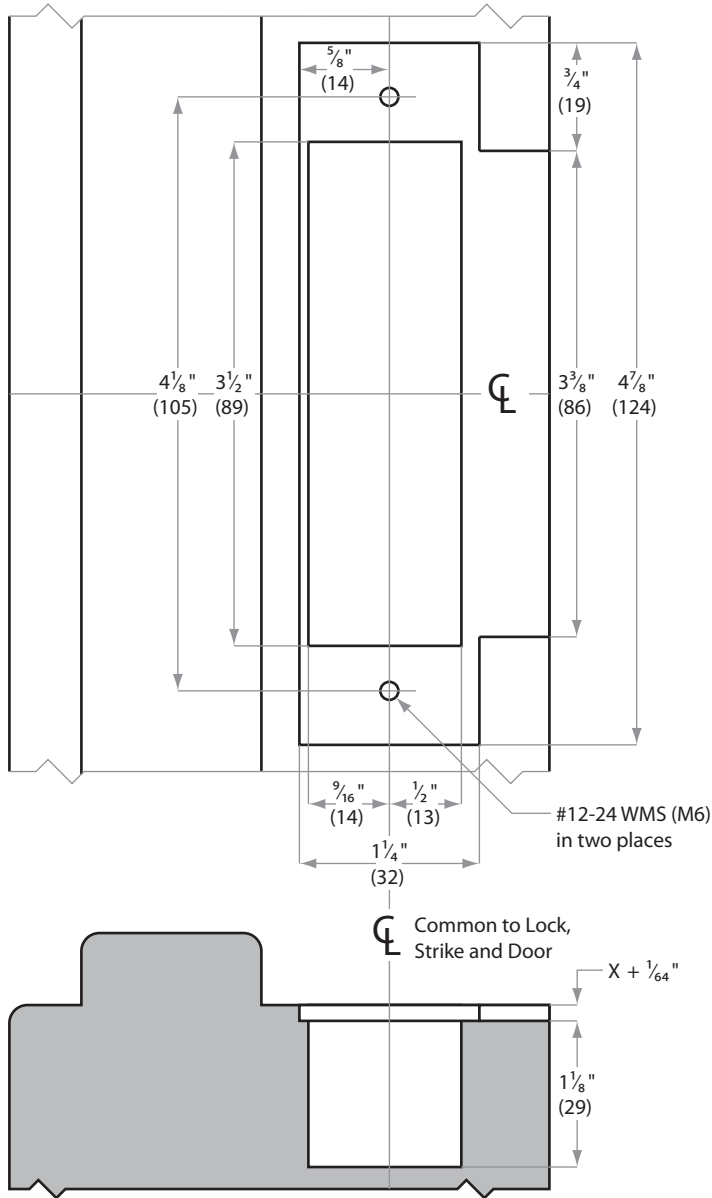

NOTE:

1. When reinforcement plate is specified, mortise additional 1/8" (3) to Dimension X
2. Strike location on frames must be adjusted for thickness of door silencers when used

Dimension X: 3/32" (2) when strike box not specified
 5/32" (4) for strike box, detached



Wood Jamb

Jamb Type: Wood
 Door Thickness: 1-3/4" (45mm)
 Description: ANSI, Square Corner, No Box
 Standard For: OCL200 Series Locks

orcahardware.com

Dimensions shown in parentheses () are in millimeters.

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

**OCL Series
 ASA Strike
 OCLASA**


Orca Hardware

Do Not Scale Drawing

Supersedes _____ Dr. _____ App. _____


Date 5-18 Template Number OCLASAW

ASA Strike

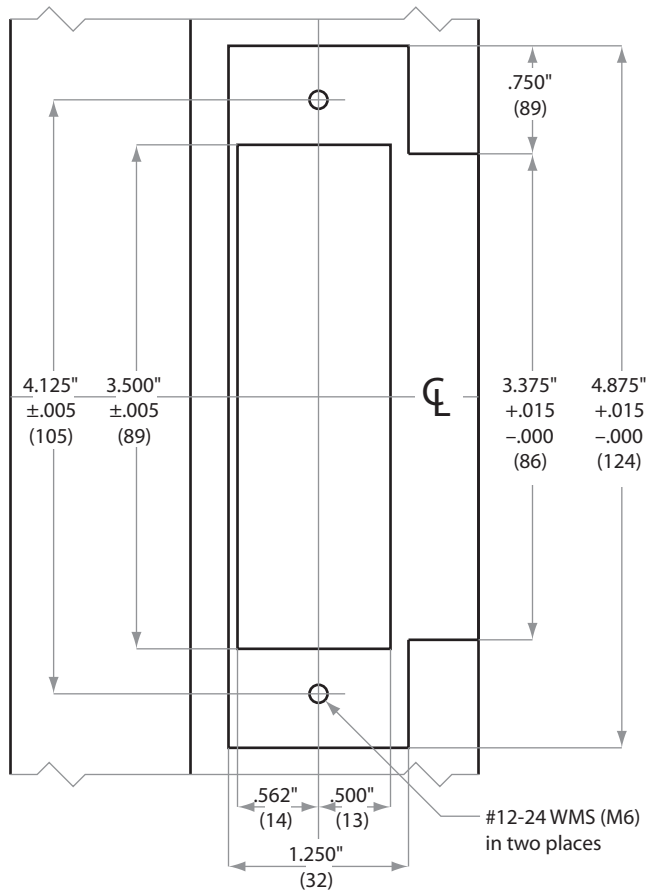

NOTE:

- Strike location on frames must be adjusted for thickness of door silencers when used

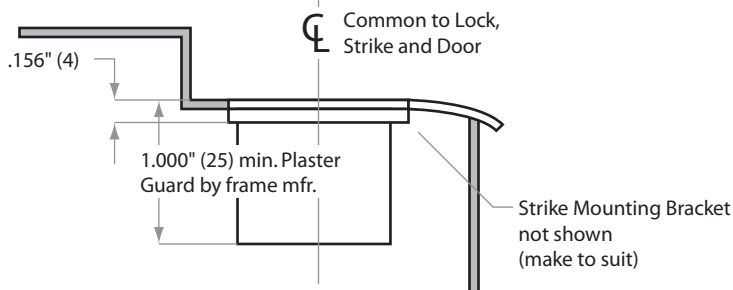

Metal Jamb

Jamb Type: Metal
 Door Thickness: 1-3/4" (45mm)
 Description: ANSI, Square Corner, No Box
 Standard For: OCL200 Series Locks

orcahardware.com

Dimensions shown in parentheses () are in millimeters.

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

**OCL Series
 ASA Strike
 OCLASA**

Orca Hardware

Do Not Scale Drawing

Supersedes _____ Dr. _____ App. _____

Date **5-18** Template Number **OCLASAM**